

# MESH Ø 80cm

Design Francisco Gomez Paz

**LUCE  
PLAN**

Type:	Suspension
Light source:	D86KT080 LED 53W 2700K CRI 90 dimmable phase cut 3.081 lm
Product use:	Indoor
Materials:	Structure in steel, lenses in polycarbonate
Colors:	Black
Description:	The particular structure permits exceptional freedom in the control of luminance: it is possible to govern the intensity of the light.

Insulation class and mark:

Rating: 220-240 V ~ 50/60 Hz, 64W


Reference code: Structure

**Mesh complete, phase cut version, Ø 80 cm**

D86KT081	1D86KT081001	cable lenght 1 m
D86KT082	1D86KT082001	cable lenght 2 m
D86KT083	1D86KT083001	cable lenght 3 m
D86KT084	1D86KT084001	cable lenght 4 m
D86KT085	1D86KT085001	cable lenght 5 m



D86KT080

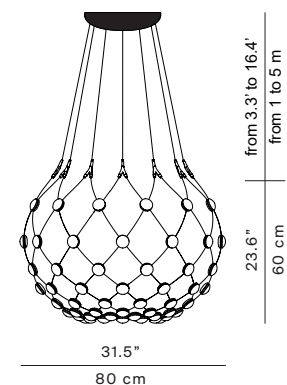

Ceiling rose: Ø 30 x 7 cm

**D86 MESH DIMMER LIST**

Brand	Model number (Dimmer)	Dimming Range	Leading/ Trailing edge
ELKO	315GLE	7-100%	Trailing edge
Schneider	SBD315RC	10-100%	Trailing edge
Lutron	RISU-452	8-100%	Trailing edge
Lutron	LLSI-502	15-100%	Leading edge
CLIPSAL	32E450TM	15-100%	Trailing edge
CLIPSAL	32E450LM	18-100%	Leading edge
JUNG	243EX	18-100%	Trailing edge
BerKer	2873	0-100%	Leading edge
Asialink	8082	17-100%	Leading edge
DOYLE & TRATT PRODUCTS LTD	P500	17-100%	Leading edge
SIEMENS	400W	30-100%	Leading edge
VADSBO	LD220	1-100%	Trailing edge
MALMBERGS	HD2200	10-100%	Trailing edge
Eltako	EUD61NPN-UC	0-100%	Trailing edge
Eltako	EUD12NPN-UC	0-100%	Trailing edge